


FEATURES

- Long stroke design
- Linear high stability suspension
- Low damping rubber surround
- Long copper voice coil
- Non-conducting reinforced fibre glass coil former
- Very stiff mineral filled Polypropylene cone
- Vented cast aluminium chassis
- Large vented motor system
- Long life silver lead wires
- Optimized for smaller enclosures

Specs :

Nominal Impedance	4 Ω	Free air resonance, Fs	27 Hz
DC resistance, Re	3.3 Ω	Sensitivity (2.83 V / 1 m)	87.5 dB
Voice coil inductance, Le	0.73 mH	Mechanical Q-factor, Qms	7.7
Effective piston area, Sd	210 cm ²	Electrical Q-factor, Qes	0.36
Voice coil diameter	45.5 mm	Total Q-factor, Qts	0.34
Voice coil height	32 mm	Moving mass incl.air, Mms	59 g
Air gap height	8 mm	Force factor, Bl	9.6 Tm
Linear coil travel (p-p)	24 mm	Equivalent volume, Vas	37 liters
Magnetic flux density	1.03 T	Compliance, Cms	0.59 mm/N
Magnet weight	2.0 kg	Mechanical loss, Rms	1.3 kg/s
Net weight	4.7 kg	Rated power handling*	150 W

* IEC 268-5, T/S parameters measured on drive units that are broken in.

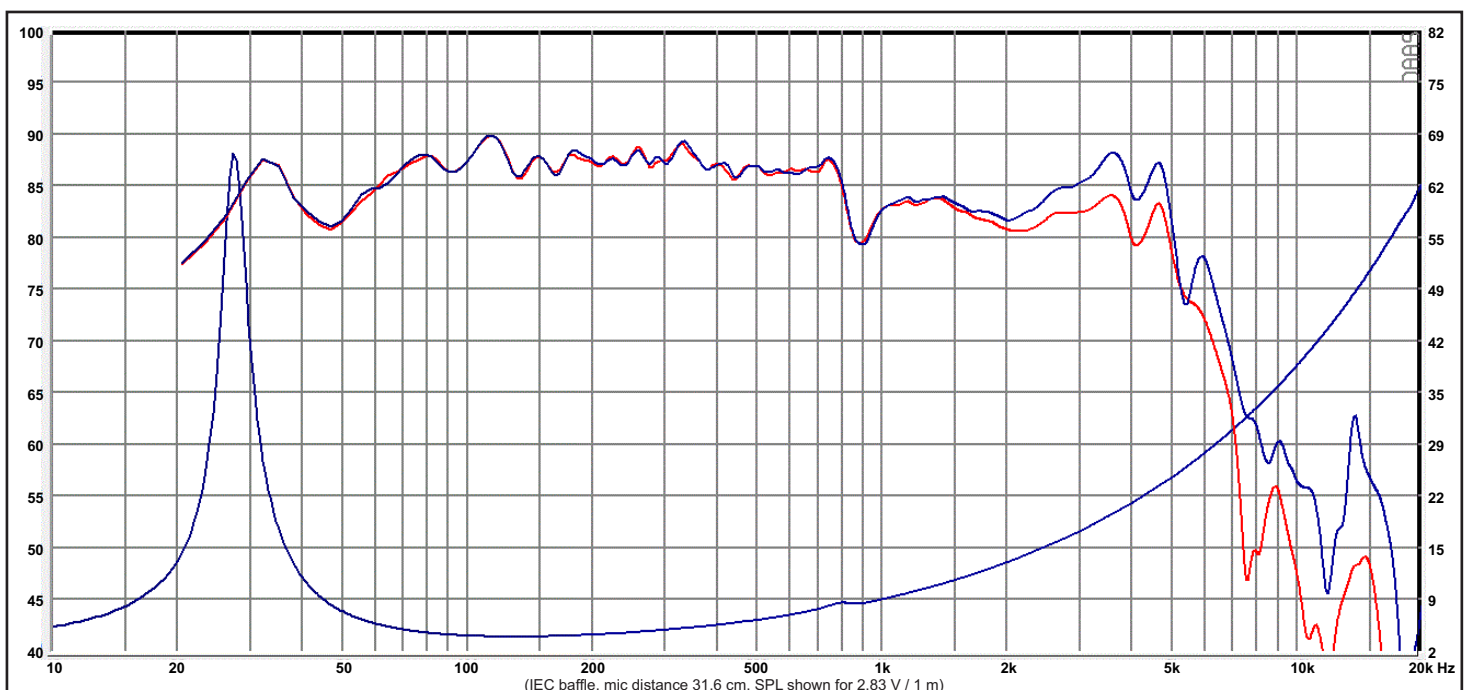

Response Curve :

— (Blue) : on axis — (Red) : 20° off-axis